



# Phoenix Wall Light 350

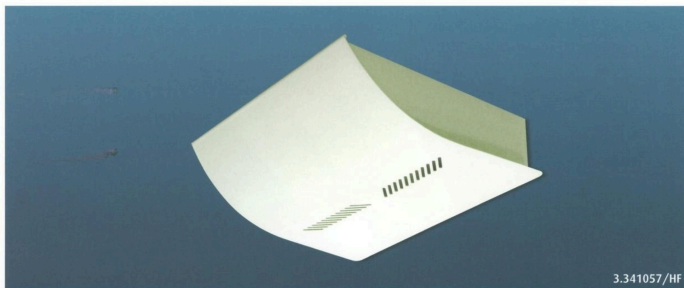

3.341057/HF



## Features

- 350mm long body, designed for use on columns and perimeter walls to provide diffused indirect lighting effects.
- Can aid compliance with CIBSE LG7 when used to supplement recessed lighting.
- Steel body finished in White RAL9010 Finetex, 20% gloss.
- New multi-wattage control gear available.
- Perforated pattern on underside creates a subtle diffused downlighting effect.

Please contact our Customer Services Department for a copy of our Relux® Lighting CD-ROM, which contains full photometric data.

## Ordering Information

REF. No.	WATTAGE	GEAR OPTIONS		
		HF	Multi-HF	DIM
<b>3.341026-42</b>	26/32/42W		●	
<b>3.341026</b>	26W			●
<b>3.341032</b>	32W			●
<b>3.341042</b>	42W			●
<b>3.341057</b>	57W	●		●

## Accessories

REF. No.	DESCRIPTION
<b>DG0060</b>	Clear 4mm toughened glass cover