

# Astrid Pixie

LED RECESSED DECORATIVE CIRCULAR LUMINAIRE FOR INTERNAL APPLICATIONS



## APPLICATIONS

- > Reception lighting
- > Hotel lighting
- > Corridor lighting
- > Entrance Lobbies
- > Office lighting
- > Hospital lighting


## FEATURES

- > Energy efficient with high output LED light source
- > Fixed output or dimmable options
- > Detachable bezel with options of white, satin silver and chrome
- > Compatible with remote occupancy and daylight control systems
- > Available with integral LiFePO4 Lithium Battery Emergency Back-up system
- > IP65 rated (Front facing)



ASTRID PIXIE 9W

ASTRID PIXIE 15W

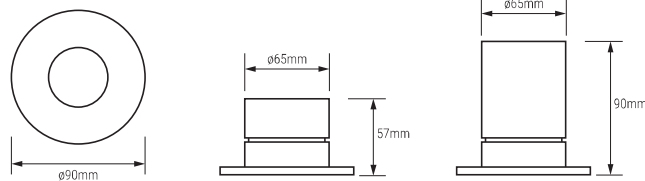

## DESCRIPTION

The Astrid Pixie is a compact recessed circular LED Down-lighter incorporating single chip technology and ideal for applications suited to the replacement of halogen down-lights. Available with either 9 Watt or 15 Watt output the Astrid Pixie can be operated either as fixed output or if required to dim, fitted with a Triac Dimming Driver. It is constructed with a dedicated heat-sink and driver and designed with a

detachable bezel, supplied as standard in white but with options of Satin Silver or Chrome. Once installed the Astrid Pixie is IP65 rated from the front. The Astrid Pixie LED PCB provides a lifespan in the region of 100,000 hours.

**Astrid Pixie** - single chip LED PCB and Driver to enable switching by remote switch or occupancy detector. Available in 9 Watt and 15 Watt.

**Astrid Pixie-Triac Dim** - single chip LED PCB and Driver to enable switching by remote switch or occupancy detector for remote dimming via a dimmer switch such as Varilight Pro. Check for compatible dimmers. Available in 9 Watt and 15 Watt.

## TECHNICAL + OPTIONS

MODEL CODE	WATTAGE	LAMP LUMEN OUTPUT	TRIM COLOURS	COLOUR TEMPERATURE	OVERALL SIZE	OPTION CODE SUFFIX
Astrid Pixie-9W	9 Watt	945 lm	White* Satin Silver Chrome	3000k 4000k*	ø 90 mm x 57 mm H ø 65 mm cutout	SS - Satin Silver CH - Chrome Triac Dim - Driver to operate with dimming switch EM3/LP4 - Emergency Pack
Astrid Pixie-15W	15 Watt	1575 lm			ø 90 mm x 90 mm H ø 65 mm cutout	

\*Default specification.