


Gemini LedLite CC

DECORATIVE CIRCULAR LUMINAIRE WITH CEILING BACKWASH LIGHTING




APPLICATIONS

- > Corridor Lighting
- > Stairwells
- > Reception and Entrance Lobbies
- > Lounges
- > Bedrooms

FEATURES

- > Energy efficient with high output LED light source
- > Dual circuit PCB to enable background comfort light
- > Variable output options
- > Plug-in connector for mains supply
- > Decorative circular luminaire with vented back to disperse heat
- > Quick release gear tray
- > Available in white, chrome, satin nickel & brass
- > Compatible with occupancy and daylight control systems, either integrally mounted or remote
- > Available with integral LiFePO4 Lithium Battery Back-up system

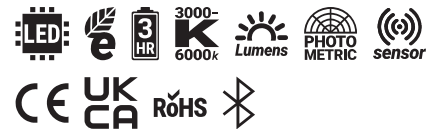

DESCRIPTION

The Gemini is a Circular Slimline Decorative Luminaire that has been designed for use in residential and commercial applications providing energy efficient lighting with high output illumination. The luminaire is constructed from a spun steel body, quick release gear tray - finished in satin white powder coat and supplied with a prismatic diffuser. It is designed to provide both downward light illumination plus a backwash of light to the ceiling.

The Gemini incorporates the LedLite CC LED PCB, providing a lifespan in the region of 100,000 hours.

Gemini LedLite CC-3/1-MicroMac - twin Circuit LedLite LED PCB and Drivers to enable switching by the MicroMac Microwave Detector at full output only during occupancy, with low wattage secondary circuit providing permanent comfort light when unoccupied. Supplied with Clear Prismatic Diffuser.

Gemini LedLite CC-Dali Dim - Linked Single Circuit LedLite LED PCB for dimming operation from the dimmable driver to be operated by integral detector or remote dimmer switch and supplied with Clear Prismatic Diffuser.

Gemini LedLite CC-MicroMac - Linked Single Circuit LedLite LED PCB and Driver to enable complete "On/Off" switching by the MicroMac Microwave Occupancy Detector of the linked circuits. Supplied with Clear Prismatic Diffuser.

Gemini LedLite CC - Linked Single Circuit LedLite LED PCB and Driver to enable complete "On/Off" switching by remote switch of the linked circuits. Supplied with Clear Prismatic Diffuser.

Also available is the **Gemini Ledlite CC -Triac Dim** to enable dimming from a recommended remote dimming switch.

TECHNICAL + OPTIONS

MODEL CODE	WATTAGE	LAMP LUMEN OUTPUT	TRIM COLOURS	COLOUR TEMPERATURE	OVERALL SIZE	OPTION CODE SUFFIX
Gemini LedLite CC 22W	22W	2000 lumens	White* Chrome Brass	3000k 4000k*	ø 526 mm x 104 mm H	CH - Chrome BS - Brass OPR - Prismatic Diffuser EM3/LP4 - Integral Emergency Pack RGB - Colour Change Ceiling Wash
Gemini LedLite CC 26W	26W*	2200 lumens				
Gemini LedLite CC 28W	28W	2460 lumens				

*Default specification.