


Taurus LedLite CC

ANTI-LIGATURE DECORATIVE CIRCULAR LUMINAIRE

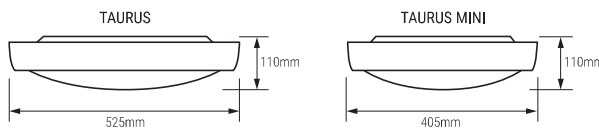


APPLICATIONS

- > Corridor Lighting
- > Stairwells
- > Reception and Entrance Lobbies
- > Lounges
- > Bedrooms
- > Toilets

FEATURES

- > Anti-ligature design with Security Screws to provide a fully enclosed luminaire
- > Energy efficient high output LED light source
- > Dual circuit PCB to enable background comfort light
- > Variable output options
- > Plug-in connector for mains supply
- > Decorative circular luminaire with vented back to disperse heat
- > Quick release gear tray
- > Available in white satin trim
- > Compatible with occupancy and daylight control systems, either integrally mounted or remote
- > Available with integral LiFePO4 Lithium Battery Back-up system

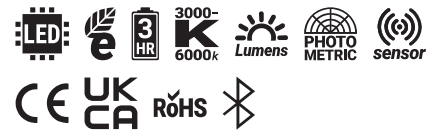

DESCRIPTION

The Taurus is a Circular Slimline Decorative Luminaire that has been designed for applications where anti-ligature fittings are required, providing energy efficient lighting with high output illumination. The luminaire is constructed from a spun steel back body, quick release gear tray and spun diffuser ring that is fixed into place with security screws. Apart from the primary use as an anti-ligature luminaire, the Taurus is also suitable for applications where a more robust vandal resistant fitting is required and luminaire access needs to be restricted. It is finished in satin white powder coat and supplied with a prismatic diffuser.

The Taurus incorporates the LedLite CC LED PCB,

providing a lifespan in the region of 100,000 hours.

Taurus LedLite CC-3/1-MicroMac - twin Circuit LedLite LED PCB and Drivers to enable switching by the MicroMac Microwave Detector at full output only during occupancy, with low wattage secondary circuit providing permanent comfort light when unoccupied. Supplied with Clear Prismatic Diffuser.

Taurus LedLite CC-Dali Dim - Linked Single Circuit LedLite LED PCB for dimming operation from the dimmable driver to be operated by integral detector or remote dimmer switch and supplied. Supplied with Clear Prismatic Diffuser.

Taurus LedLite CC-MicroMac - Linked Single

Circuit LedLite LED PCB and Driver to enable complete "On/Off" switching by the MicroMac Microwave Occupancy Detector of the linked circuits. Supplied with Clear Prismatic Diffuser.

Taurus LedLite CC - Linked Single Circuit LedLite LED PCB and Driver to enable complete "On/Off" switching by remote switch of the linked circuits. Supplied with Clear Prismatic Diffuser.

Also available is the **Taurus LedLite -Triac Dim** to enable dimming from a recommended remote dimming switch

Taurus Mini LedLite CC also available with a diameter of 405mm.

TECHNICAL + OPTIONS

MODEL CODE	WATTAGE	LAMP LUMEN OUTPUT	TRIM COLOURS	COLOUR TEMPERATURE	OVERALL SIZE	OPTION CODE SUFFIX
Taurus LedLite CC	22W	2000 lm	White*	3000k 4000k*	ø 525 mm x 110 mm (H)	OPR - Opal Diffuser CH - Chrome Trim BS - Brass Trim EM3/LP4 - Integral Emergency Pack
	26W*	2200 lm				
	28W	2460 lm				
Taurus Mini LedLite CC	16W	1600 lm			ø 405 mm x 110 mm (H)	
	18W*	1800 lm				
	20W	2020 lm				

*Default specification.