


LITEFLOW RGBW FLEXISTRIP

FLEXIBLE RGBW COB LED STRIP FOR CONTINUOUS LIGHT OUTPUT

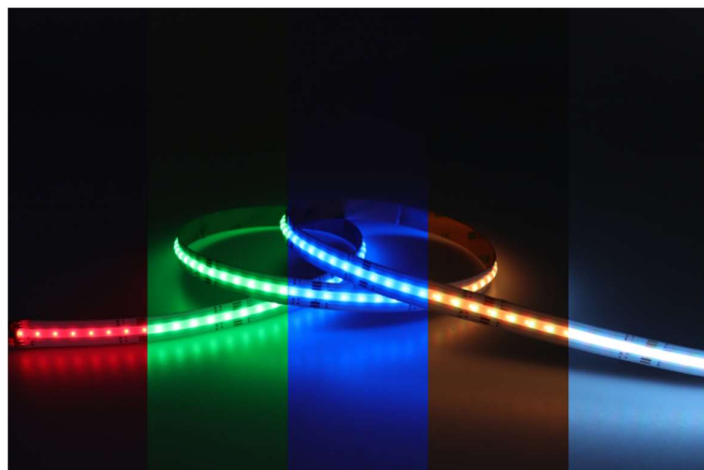

SPECIFICATION

- 14W/M
- DC24V
- RGB
- CRI >90
- 1008 Led per mtr
- 5mtr reels
- Dimmable
- 60mm cut points

APPLICATIONS

- Edge Lighting
- Cabinets
- Under Work Tops
- Retail
- Plinth Lighting
- Building Feature Lighting



With the LiteFlow RGBW Flexistrip up to 10-metre runs are achievable using a 200W LED driver. With cut points every 60mm

It can be made to suit many applications.

The LiteFlow RGBW Flexistrip gives a continuous light emission with no 'spotting' that is experienced with other forms of LED strip.

Using either hand held or wall mount controller endless operations can be achieved from strobing to smooth colour change or block colours.

Direct mount or a wide range of mounting profiles are available depending on the application.

PART	COLOUR	VOLTAGE	WATTS/MTR	CRI	DIMMENSIONS
LITEFLOW RGBW FLEXISTRIP	RGBW	24VDC	17.2W/MTR	CRI90	5000MMX10MM

DRIVER OPTIONS

Drivers	WATTAGE	OUTPUT	IP RATING
ELG-200-24V-(D)	200W	24VDC	IP65
LPV-150-24V-(D)	150W	24VDC	IP65
LPV-100-24V-(D)	100W	24VDC	IP65
DR-CV-60-24V-(D)	60W	24VDC	IP20/IP65
DR-CV-40-24V-(D)	40W	24VDC	IP20/IP65

Add (D) if
Dimmable is required