


LITEFLOW SPI FLEXISTRIP

FLEXIBLE COB LED STRIP WITH SPI CONTROL

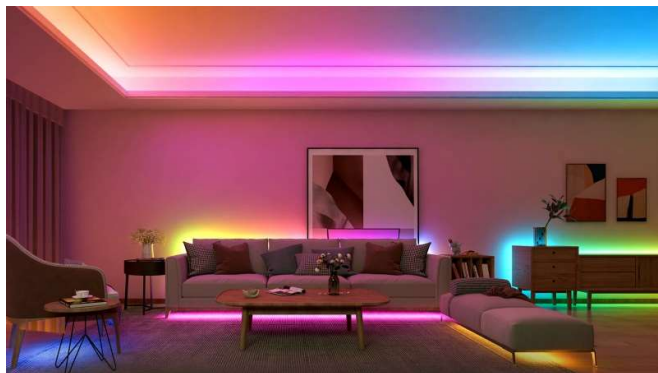


APPLICATIONS

- Edge Lighting
- Cabinets
- Under Work Tops
- Retail
- Plinth Lighting
- Show Rooms
- Feature lighting

SPECIFICATION

- 10W/M
- DC24V
- IP20/IP65
- 10MM x 5000MM
- Cuttable every 25mm
- SPI110E APP Controlled
- Over 200 different programmes

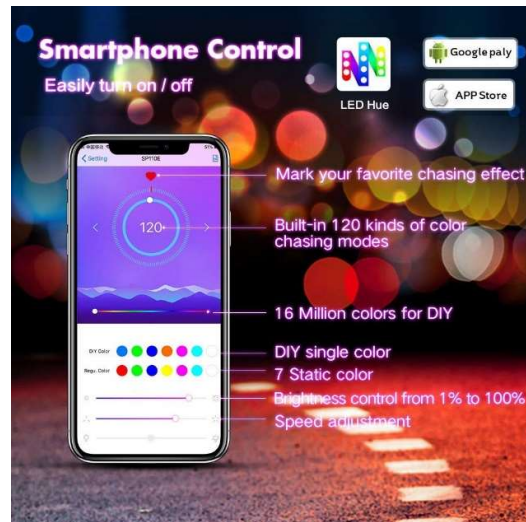

Description

With the LiteFlow SPI Flexistrip up to 10-metre runs are achievable using a 200W LED driver.

With cut points every 25mm it can be made to suit many applications.

Download the LED HUE APP to your smart phone from the QR code on the controller and have total control of your application with over 200 programmes and functions from a huge, fixed colour spectrum to chasing and fading effects.

Switch your lighting on or off when you are not there.

Direct mount or a wide range of mounting profiles are available depending on the application.

DRIVER OPTIONS

Drivers	WATTAGE	OUTPUT	IP RATING
ELG-200-24V-(D)	200W	24VDC	IP65
LPV-150-24V-(D)	150W	24VDC	IP65
LPV-100-24V-(D)	100W	24VDC	IP65
DR-CV-60-24V-(D)	60W	24VDC	IP20/IP65
DR-CV-40-24V-(D)	40W	24VDC	IP20/IP65