


Astrid Strata

LOW PROFILE SURFACE MOUNT LINEAR LED LUMINAIRE

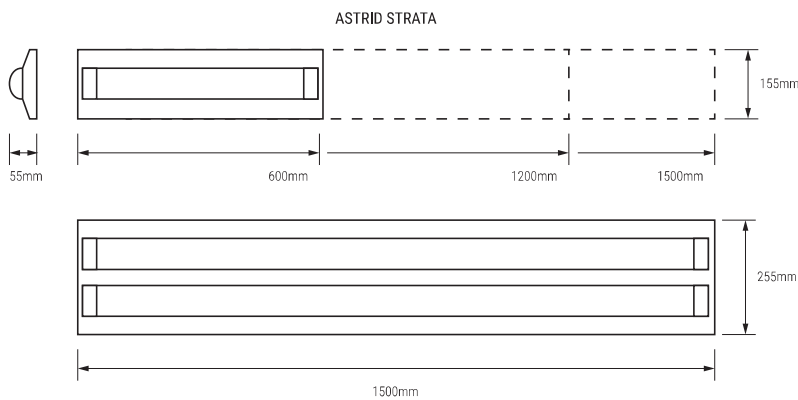


APPLICATIONS

- > Offices / Waiting & Meeting Rooms
- > Kitchens
- > Showrooms
- > Retail Front Store Lighting
- > Libraries / Classrooms
- > Laboratories
- > Warehousing & Stock Rooms

FEATURES

- > Energy efficient with high output LED light source
- > Two component luminaire with steel back body and clip-in LED Modular with Plug-in connector for mains supply
- > Various sizes
- > Finished with white satin trim
- > Compatible with occupancy and daylight control systems, either integrally mounted or remote
- > Available with integral LiFePO4 Lithium Battery Emergency Back-up system

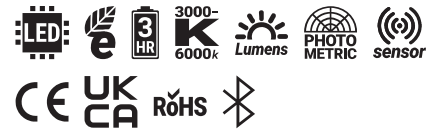

DESCRIPTION

The **Astrid Strata** is a low profile LED linear luminaire, designed for surface mounting, with the versatility of use in many applications. It is modern and sleek in appearance and is suitable for both commercial and domestic use. The **Astrid Strata** is a two component luminaire constructed with a steel back body, powder coated with a white finish and a clip-in LED PCB module with opal diffuser.

Available in a range of sizes the **Astrid Strata** is fitted with High Output LED SMD Chips and driven with an Osram or equivalent proprietary branded driver. Whilst supplied as standard with fixed output illumination, there are options to supply with dimmable drivers for remote switch dimming or via occupancy detection.

The **Astrid Strata** incorporates the LedLite Linear LED PCB, providing a lifespan in the region of 100,000 hours.

Model Options

- Astrid Strata 060 - 600mm
- Astrid Strata 112 - 1200mm
- Astrid Strata 115 - 1500mm
- Astrid Strata 215 - Twin 1500mm

TECHNICAL + OPTIONS

MODEL CODE	WATTAGE	LAMP LUMEN OUTPUT	TRIM COLOURS	COLOUR TEMPERATURE	OVERALL SIZE	OPTION CODE SUFFIX
ASTRID-STRATA-060	18W	1620 lm	White*	3000k 4000k*	600 x 155 x 55 mm (H)	EM3/LP4 - Integral Emergency Pack
ASTRID-STRATA-112	36W	3250 lm			1200 x 155 x 55 mm (H)	
ASTRID-STRATA-115	45W	4500 lm			1500 x 155 x 55 mm (H)	
ASTRID-STRATA-215	90W	9000 lm			1500 x 255 x 55 mm (H)	

*Default specification.